

## INSTALLATION GUIDE


### For Plain Posts (in-ground holes, concreted)

1. Use a string line on the ground and mark out where the fence is to be located.
2. Check on this brochure the panel length(s) for the type of Cyclone Panel Fence you have chosen.
3. Make a measuring stick the length of the panel plus another 60mm to allow for centre to centre of the posts.
4. Start fence installation by installing the gate pack. Dig two gate holes approximately 200mm diameter x 600mm deep. (For posts with base plates, see below).
5. Use blocks under the bottom spacer bar of the 'pre assembled' gate pack with posts to achieve the correct gate clearance above finished ground level. (Maximum ground clearance of 100mm).
6. Support gate assembly with temporary diagonal braces. Check for levels and squareness and concrete in. Do not remove the top spacer bar as this helps to keep everything square, (when concrete is dry both the top spacer bars can be removed).
7. Use your measuring stick (see step 3) to mark out where the posts for the panels will go.
8. Dig the first post hole. Attach a fence panel to the gate post to give the first post positioning. Place the post in the hole, ram some earth around bottom of the post to steady it until it will free-stand. Attach a fence panel to the gatepost and your first 'line post' with the clips and bolts provided (posts have bolt holes pre-drilled). Note: The clearance between the bottom of the panel and finished ground level MUST NOT EXCEED 100mm.
9. For corner posts, either drill two holes or use self tapping bolts to attach clips.
10. Now re-check with the measuring stick that you have the correct spacing for the next post and repeat steps 8 and 9.
11. Check the whole fence for level and alignment and finish by concreting posts in and tightening bolts and nuts.



### For Posts with Base Plates

Use masonry bolts for concrete or coach screws for timber decks (see diagram)



### Gate Pack Assembly

With Plain or Base Plate Posts Pre-assembled ready to install. 1030mm wide. Self-closing, Magnalatch (child-proof), key-lockable.

### Fittings

Posts are supplied with stainless steel bolts and nuts. Panels are supplied with galvanised clips. Base Plate Fasteners not supplied.




### For Sloping Sites

Use the short panels or cut standard panels to half lengths (bolt cutter, grinder or hacksaw). Using twice the number of posts, step the panels as shown in sketch 5.




## PANEL FENCING

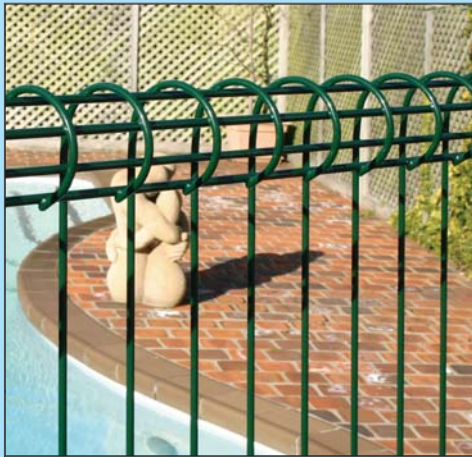

## "SAFETY WITH STYLE"



## POOL AND PLAY

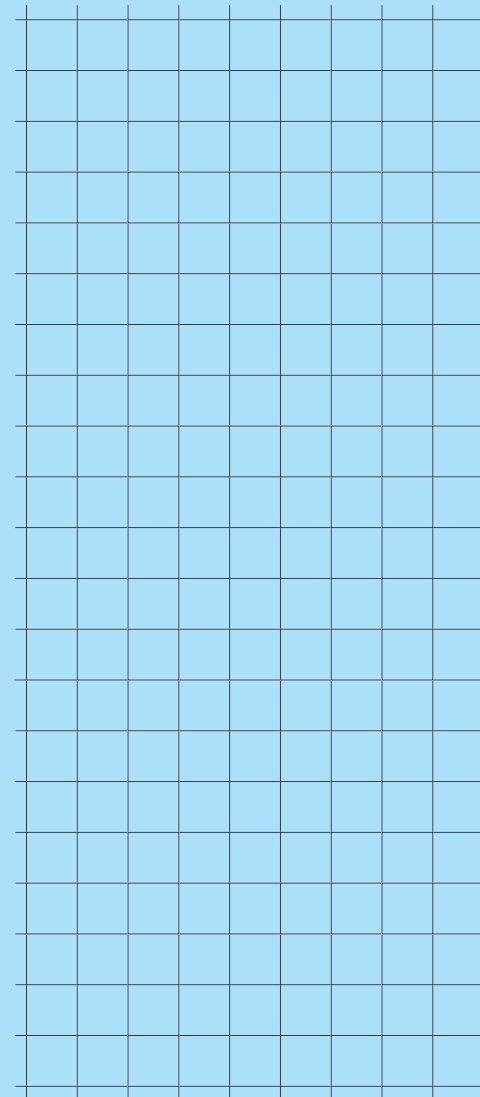

### HANDY PLANNING GRID

- Panels: @ \$ \_\_\_\_\_; Totals: \$ \_\_\_\_\_
- Panels: @ \$ \_\_\_\_\_; Totals: \$ \_\_\_\_\_
- Gates: @ \$ \_\_\_\_\_; Totals: \$ \_\_\_\_\_
- Fasteners: @ \$ \_\_\_\_\_; Totals: \$ \_\_\_\_\_
- Concrete: @ \$ \_\_\_\_\_; Totals: \$ \_\_\_\_\_

Material list/costings Overall cost: \$ \_\_\_\_\_



## INTRODUCTION

### SAFETY WITH STYLE

Visually effective Cyclone Pool & Play fence is available in colours to suit landscape and decor making it architecturally appealing plus the added safety benefit of see-through visibility to observe play activity. Cyclone Pool & Play fence complies with the Fencing of Swimming Pools Act 1987.

## IMPORTANT LEGAL REQUIREMENTS

### PLEASE READ CAREFULLY

- The pool fence regulations require that the fence can not be readily climbed by children under the age of 6 years.
- The gate must always open away from the pool.
- The gate must self close. After installation test the opening and closing operation of the gate. Open the gate to 150mm opening and release.
- The gate must not have a ground clearance more than 100mm.
- Panels must be no higher than 100mm above ground level.
- There is to be no other support such as rail, tree, deck or bracing of any kind which would allow climbing from outside the pool area within 1.2m.
- The Fencing of Swimming Pools Act 1987 requires owners to fence the pool and its immediate area according to the specifications in the law. Please consult your local authority regarding compliance.
  - You are required by this law to register your pool with your Local Authority.
  - It is your responsibility, as a pool owner, to comply with the Fencing of Swimming Pools Act 1987.
  - New pools must not be filled until approval has been granted by your Local Authority.
  - For interpretation queries on the law please contact your Local Authority.
- The two-party parliamentary committee which investigated the need for the law found conclusive evidence that no other water hazard is more dangerous for pre-schoolers than an unfenced pool. They concluded that young children have a right to protection from these human-made hazards. Because the young victims are almost always living on the owners' property or legitimately invited there before they drown, we urge you to comply with the law and protect your own children and those of friends.

## ROLL TOP, STRAIGHT BASE



DESCRIPTION	HEIGHT	LENGTH	DIAMETER
PANELS	1380mm	900mm	
PANELS	1380mm	1800mm	
PANELS	1380mm	2400mm	
POSTS - no base	2170mm		50mm square
POSTS - with base	1455mm		50mm square
GATE PACK (includes posts, self closing hinges & lockable latch)			

Measurements are nominal.


## TRIANGLE FOLDED TOP & BASE



DESCRIPTION	HEIGHT	LENGTH	DIAMETER
PANELS	1250mm	2400mm	
PANELS	1250mm	1800mm	
POSTS - no base	2000mm		50mm square
POSTS - with base	1380mm		50mm square
GATE PACK (includes posts, self closing hinges & lockable latch)			

Measurements are nominal.

## TUBE TOP & BASE (25mm SQUARE)

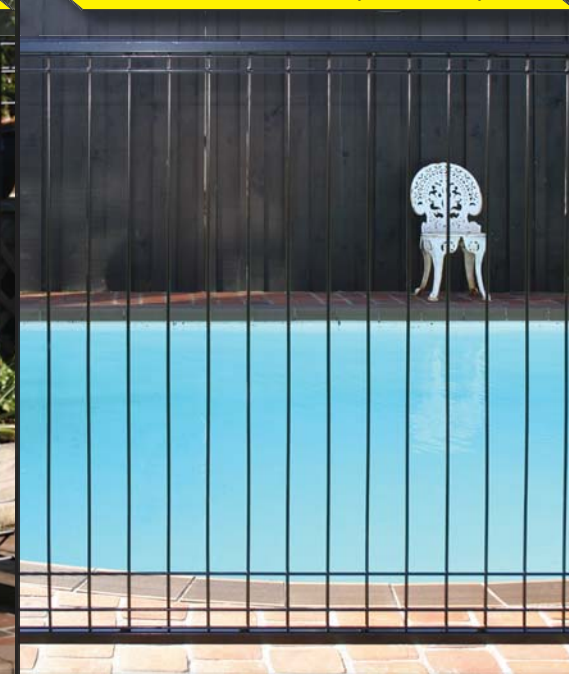

SPECIFICATIONS	HEIGHT	LENGTH	DIAMETER
PANELS	1230mm	2400mm	
POSTS - no base	2000mm		50mm square
POSTS - with base	1380mm		50mm square
GATE PACK (includes posts, self closing hinges & lockable latch)			


Measurements are nominal.

## GALVANISED OR POWDER COATED FINISH

### GALVANISED

Cyclone Pool Fencing panels, poles and all fittings are manufactured using high quality materials and finished with a hot dip galvanised coating to provide users with excellent prolonged life characteristics.


### GALVANISED

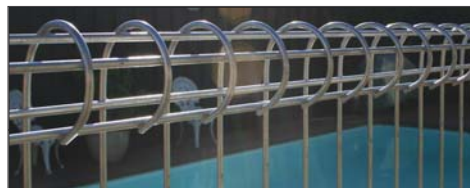

### POWDER COATED (over galvanised coating)

All Cyclone Pool Fence components can be powder coated and are available in either Hawthorn Green or Black Satin. Customised colour coating to suit your existing decor are also available on request.

### HAWTHORNE GREEN POWDER COAT



**IMPORTANT:** In coastal environments double powder coating is recommended to maintain a long term quality coating appearance. (Additional charge).

Because of tonal differences between powder coatings and printing ink - colours shown in photo's may vary slightly from those of actual product.

### BLACK SATIN POWDER COAT



FOR FURTHER DETAILS CONTACT 0800 333188

**Cyclone**

